

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

Notes:


Electrical characteristics

- 1.Impedance: 50Ω
- 2.Working voltage: $\leq 500V$
- 3.Insulation resistance: $\geq 1000M\Omega$
- 4.Dielectric withstanding voltage: $750V$
- 5.Contact resistance

Center contact $\leq 5M\Omega$
Outer contact $\leq 2.5M\Omega$

Material&Finish

Inner Contact: Brass, gold plated
Outer Contact: brass,gold plated
Insulators: Teflon

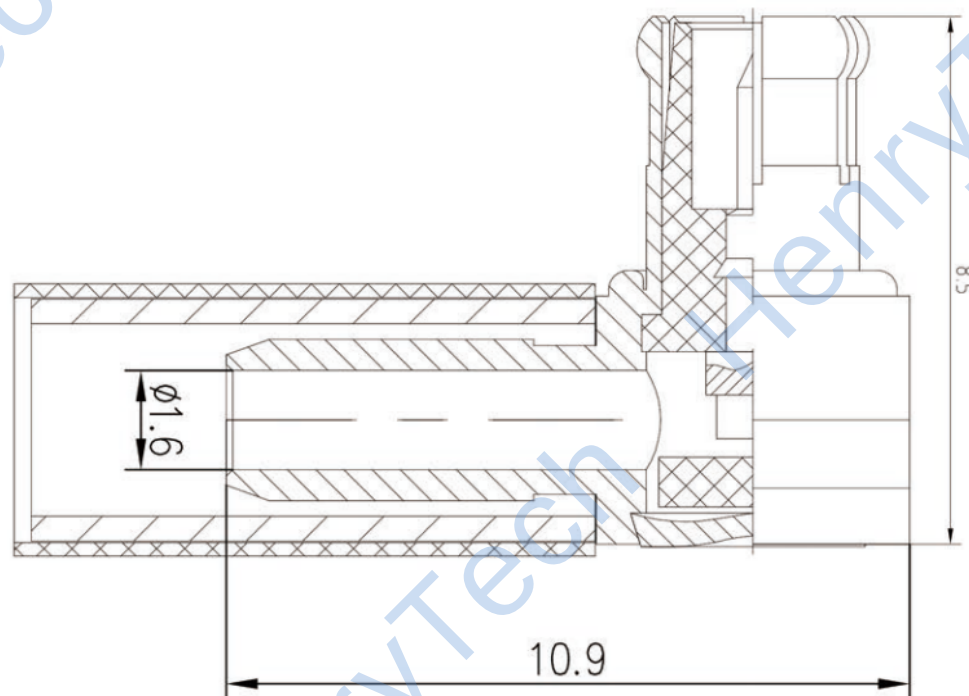

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:
RF Coaxial Connector
MCX Male Right Angle
Conn. For RG316 cable

PART NO: HL-MCX-JW3



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------