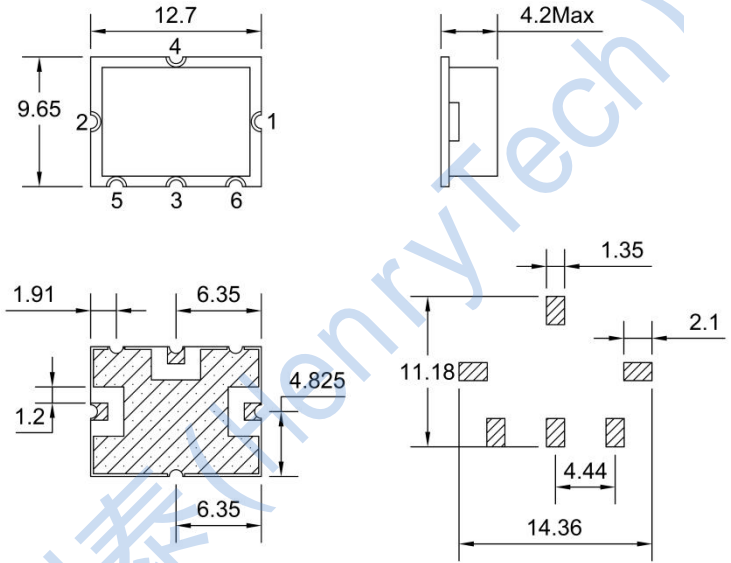


产品技术协议				产品型号	HT-FM2-100-2000M														
				产品名称	倍频器	共 1 页	第 1 页												
				版本	A	修改状态	0												
序号	指标名称	符号	单位	指标、参数 (25°C)															
01	频率范围	Fo	MHz	输入: 50MHz-1000MHz 输出: 100MHz-2000MHz															
02	转换损耗	F2	C.L	Max: 16															
03	谐波输出	F1	H.O	dBc															
		F3		Min: 16															
04	输入功率	I.P	dBm	10~20dBm															
05	工作温度	To	°C	-20 ~ +70°C															
06	外形尺寸	Fig	mm	12.7*9.65*4.2Max															
<div style="text-align: center;">  <p>Units:mm Tolerance:±0.3</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>引脚</th> <th>符号</th> <th>功能</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>/</td> <td>输入</td> </tr> <tr> <td>2</td> <td>/</td> <td>输出</td> </tr> <tr> <td>3, 4, 5, 6</td> <td>/</td> <td>接地</td> </tr> </tbody> </table> </div>								引脚	符号	功能	1	/	输入	2	/	输出	3, 4, 5, 6	/	接地
引脚	符号	功能																	
1	/	输入																	
2	/	输出																	
3, 4, 5, 6	/	接地																	