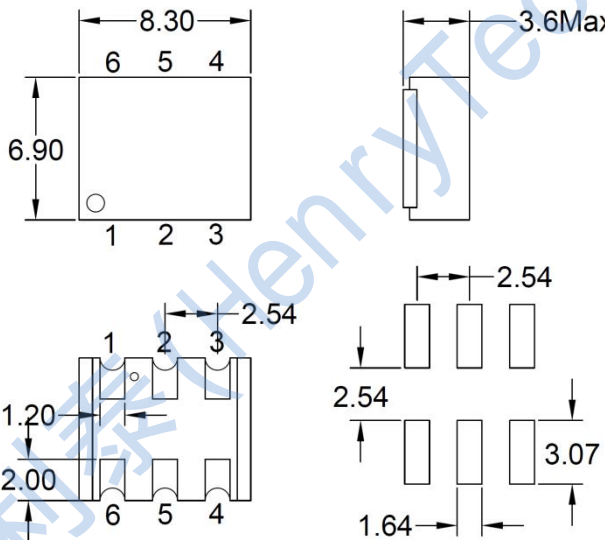


产品技术协议				产品型号	HT-FM2-20-1000M																	
				产品名称	倍频器	共 1 页	第 1 页															
				版本	A	修改状态	0															
序号	指标名称	符号	单位	指标、参数 (25°C)																		
01	频率范围	Fo	MHz	输入: 10MHz-500MHz 输出: 20MHz-1000MHz																		
02	转换损耗	F2	C.L	dB Max: 14.5																		
03	谐波输出	F1	H.O	dBc Min: 20																		
		F3	H.O	dBc Min: 25																		
		F4	H.O	dBc Min: 12																		
06	输入功率	I.P	dBm	4~10dBm																		
07	工作温度	To	°C	-40~85°C																		
08	贮存温度	Ts	°C	-55~100°C																		
09	外形尺寸	Fig	mm	8.3*6.9*3.6Max																		
<div style="text-align: center;">  <p>Units:mm Tolerance:±0.3</p> <table border="1" data-bbox="638 1568 1085 1792"> <thead> <tr> <th>引脚</th> <th>符号</th> <th>功能</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>/</td> <td>输入</td> </tr> <tr> <td>6</td> <td>/</td> <td>输出</td> </tr> <tr> <td>2</td> <td>/</td> <td>空</td> </tr> <tr> <td>1, 4, 5</td> <td>/</td> <td>接地</td> </tr> </tbody> </table> </div>								引脚	符号	功能	3	/	输入	6	/	输出	2	/	空	1, 4, 5	/	接地
引脚	符号	功能																				
3	/	输入																				
6	/	输出																				
2	/	空																				
1, 4, 5	/	接地																				