

LTCC 高通滤波器 (High Pass Filter)

HT-HFCN-3500+

Features

- Low insertion loss.
- Good rejection.
- LTCC Construction.
- temperature stable.
- Small size.


Applications

- Sub-harmonic rejection.
- Transmitters/receivers.
- Lab use.


Pad Connections

RF IN	1
RF OUT	3
GROUND	2,4,5,6

Outline Drawing

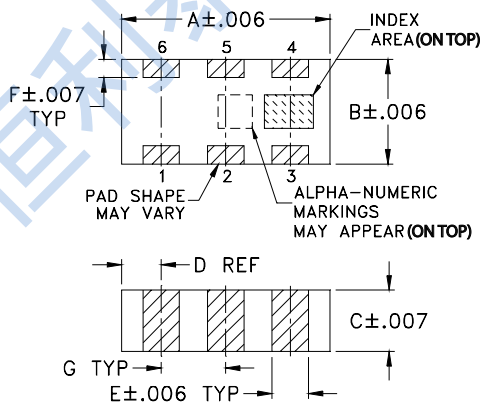


PCB Land Pattern

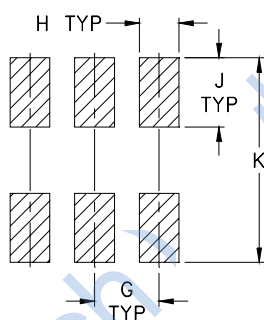

Outline Dimensions : inch mm

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

Functional Schematic




50 Ω
3900MHz to 9800MHz

Electrical Specifications(1) at 25°C


Parameter		Frequency (MHz)	Min.	Typ.	Max.	Units
Pass Band	Insertion Loss	3900-9800	—	—	2.0	dB
		4000-8800	—	—	1.5	
	VSWR	3650-9500	—	1.5	—	: 1
Stop Band	Rejection Loss	2900	—	30	—	dB
		2800	20	—	—	
	Freq. Cut-Off	3300	—	3.0	—	dB
	VSWR	2800-2900	—	20	—	: 1

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.

Typical Performance Data at 25°C

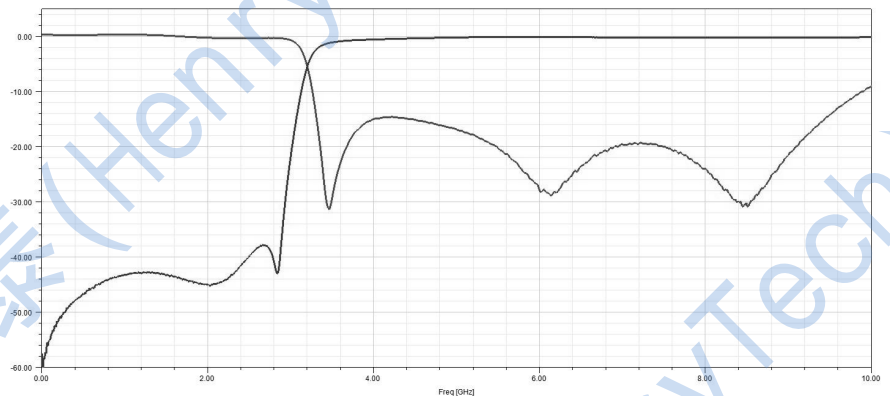

Suggested PCB Layout

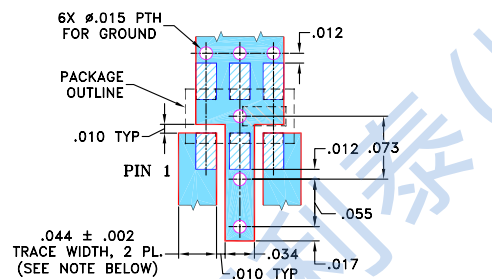

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS: $.020 \pm .0015$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Maximum Ratings

Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
RF Power Input*	7W Max at 25°C

*Permanent damage may occur if any of these limits are exceeded.