




10-12000Mhz 50Ω 2 Ways 0° Power Combiner

HT-PBR-0012SMG

Mechanical Dimensions:

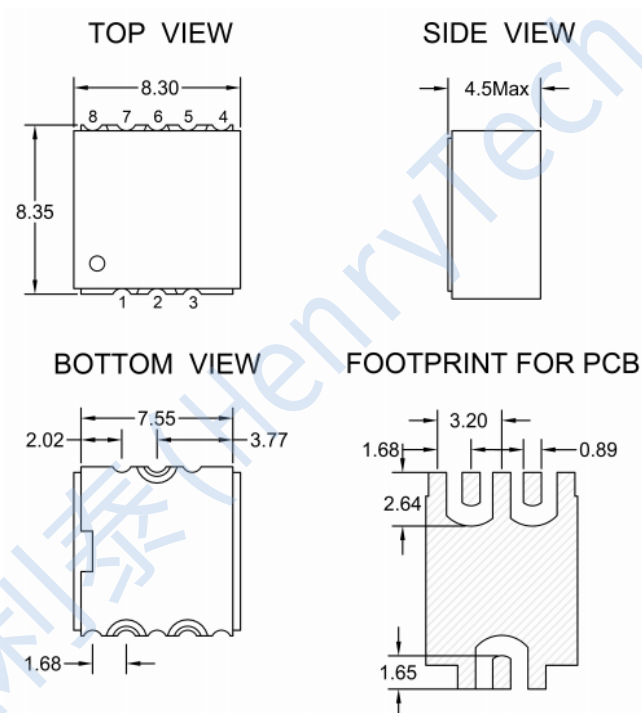

Notes:

- 1: Dimensions in mm.
- 2: Tolerance $\pm 0.3\text{mm}$ unless otherwise noted.

Schematic:



Ports Configuration:

Common	2
Input1	7
Input2	5
Ground	1,3,4,6,8

Maximum Ratings:

Parameters	Conditions	Unit	Min	Max
RF Power		Watt		1
DC Current		mA		300
Operating Temperature Range		Degree Cel	-40	85
Storage Temperature Range		Degree Cel	-55	100
Moisture Sensitivity Level				1

Ordering Information:

Part Description	Details
HT-PBR-0012SMG	500 per reel



10-12000Mhz 50Ω 2 Ways 0° Power Combiner

HT-PBR-0012SMG


Electrical Specifications: Zo=50 Ohm Pin = 0 dBm

Parameter	Test Conditions	Unit	Min	Typical	Max
Frequency Range		MHz	10	~	12000
Impedance			-	50	-
Insertion Loss	10-12000Mhz	dB	-	1.7	3.5
Isolation	10-8000Mhz	dB	22	30	-
Isolation	8000-12000Mhz	dB	20	25	-
Amplitude Balance	10-12000Mhz	dB	-	1	-
Common Port VSWR	10-12000Mhz	-	-	1.4	1.9
Input Port VSWR	10-12000Mhz	-	-	1.9	-
Nominal Power Splitting	10-12000Mhz	dB	-	6	-

Notes:

1: Specifications guaranteed over the operating temperature range.

Typical Performance Curves:

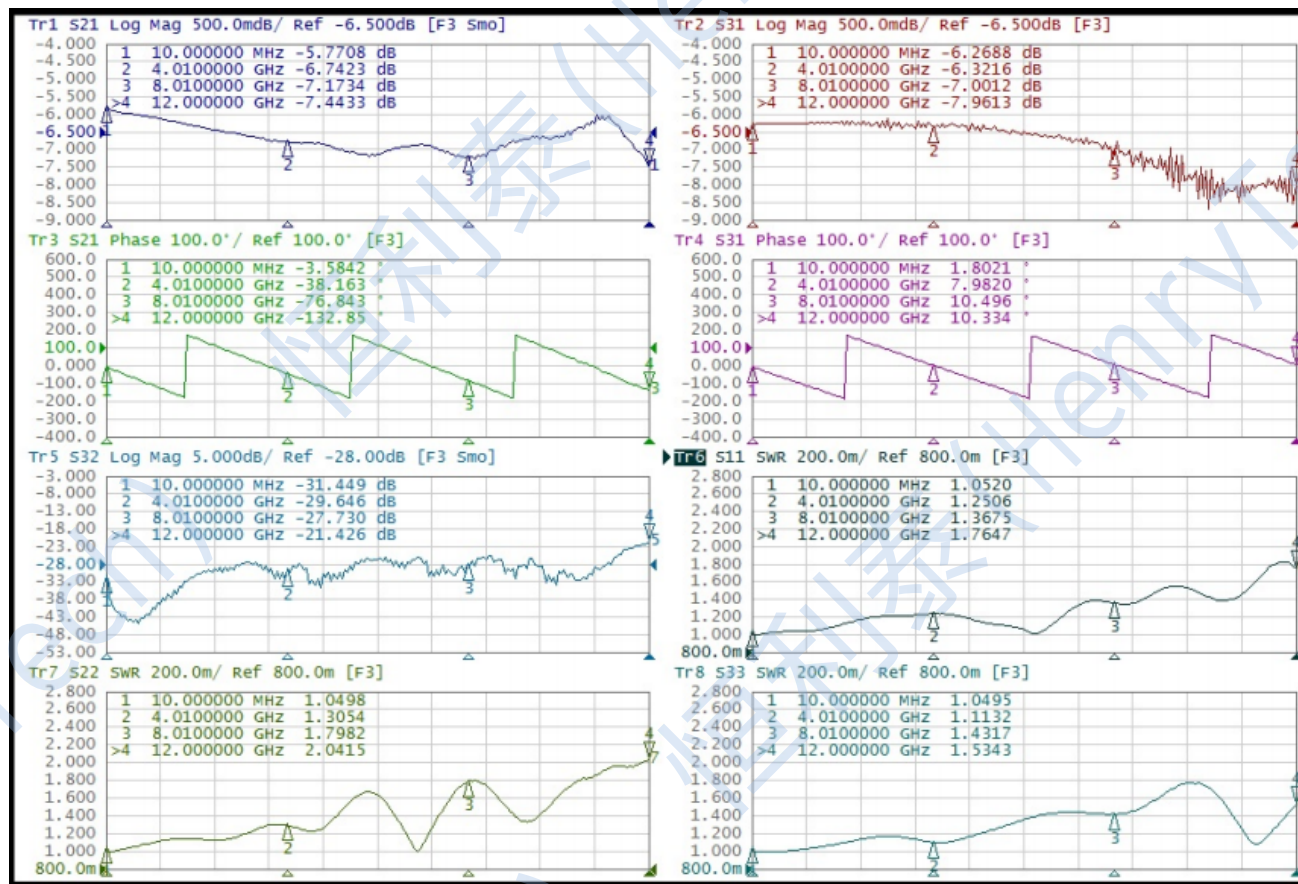

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No. 50, Shuixi Road, Jinniu District, Chengdu City