


HLT-0.5/8-2N-TW

2-Way Power Divider

Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	500~8000 MHz
2	插入损耗 Insertion Loss	≤ 1.2dB (Excluding theoretical loss 未含理论损耗3.0 dB)
3	驻波比 VSWR	Max.1.5
4	隔离度 Isolation	Min.12dB
5	幅度平衡 Amplitude Balance	±0.5dB
6	相位平衡 Phase Balance	±5°
7	阻抗 Impedance	50 Ohms
8	端口接头 Input/Output Connectors	N-Female
9	承受功率 Power Rating	Combiner 合路器用时21W，即每路输入不大于10W
10	工作温度 Operation Temperature	-45°C ~ +85°C

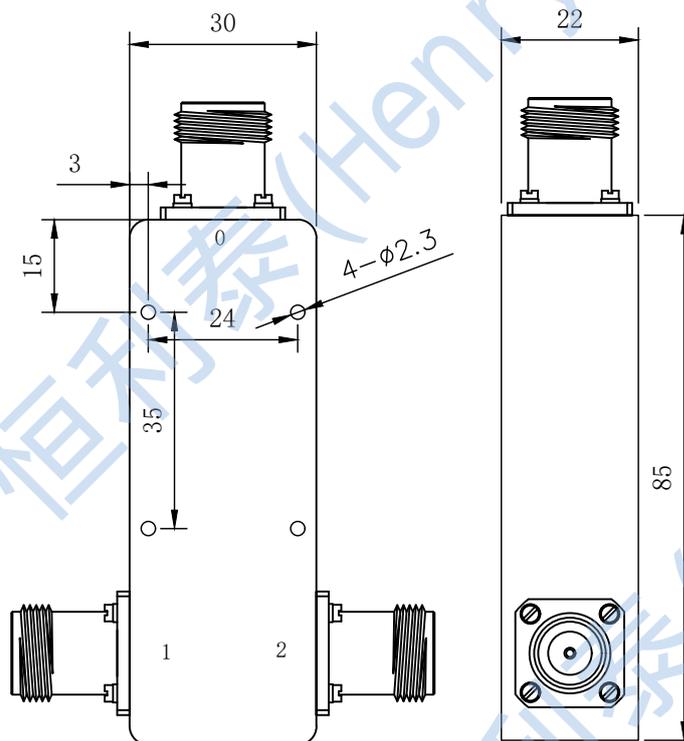

Units: mm
Tolerance: ±0.3mm