


# HLT-5/500-2S-T

## 2-Way Power Divider

### Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	5~500 MHz
2	插入损耗 Insertion Loss	≤ 0.8dB (Excluding theoretical loss 未含理论损耗3.0 dB)
3	驻波比 VSWR	Max.1.3
4	隔离度 Isolation	Min.20dB
5	幅度平衡 Amplitude Balance	±0.3dB
6	相位平衡 Phase Balance	±4°
7	阻抗 Impedance	50 Ohms
8	端口接头 Input/Output Connectors	SMA-Female
9	承受功率 Power Rating	Combiner 合路器用时1W，即每路输入不大于0.5W
10	工作温度 Operation Temperature	-55°C ~ +85°C

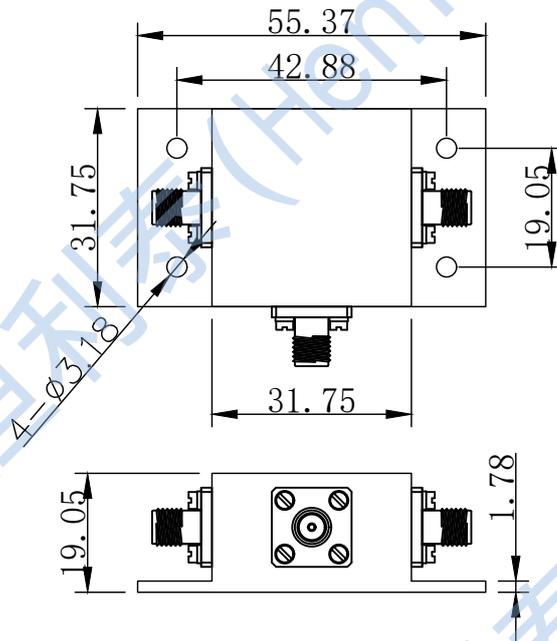

Tolerance: ±0.3mm