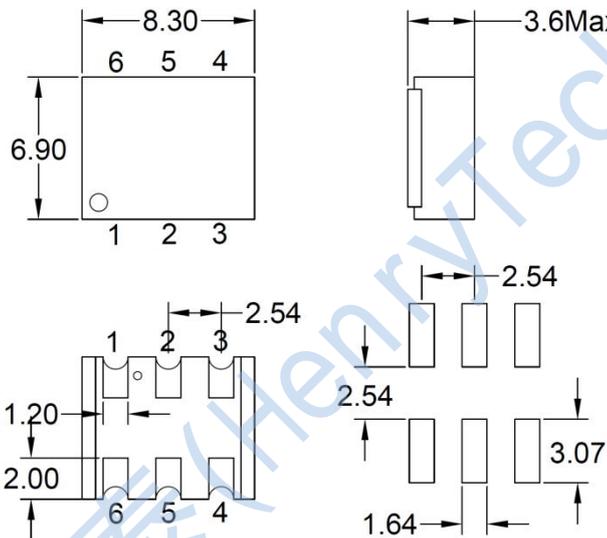


产品技术协议				产品型号	HT-ADE-2+																	
				产品名称	混频器	共 1 页	第 1 页															
				版 本	A	修改状态	0															
序号	指标名称	符号	单位	指标、参数 (25°C)																		
01	频率范围	Fo	MHz	5MHz-1000MHz																		
02	转换损耗	C.I	dB	Max: 9.5																		
03	LO-RF 隔离度		dB	Min: 22																		
04	LO-IF 隔离度		dB	Min: 20																		
05	工作温度	To	°C	-40~85°C																		
06	贮存温度	Ts	°C	-55~100°C																		
07	外形尺寸	Fig	mm	8.3*6.9*3.6Max																		
<div style="text-align: center;">  <p>Units:mm Tolerance:±0.3</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>管脚号</th> <th>符号</th> <th>功能</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>/</td> <td>RF</td> </tr> <tr> <td>6</td> <td>/</td> <td>7dBm LO</td> </tr> <tr> <td>2</td> <td>/</td> <td>IF</td> </tr> <tr> <td>1,4,5</td> <td>/</td> <td>接地</td> </tr> </tbody> </table> </div>								管脚号	符号	功能	3	/	RF	6	/	7dBm LO	2	/	IF	1,4,5	/	接地
管脚号	符号	功能																				
3	/	RF																				
6	/	7dBm LO																				
2	/	IF																				
1,4,5	/	接地																				