


# HT-PD2-350-2000M-50W

## 2-Way Power Divider Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	350~2000 MHz
2	插入损耗 Insertion Loss	≤ 1.0dB (Excluding theoretical loss 未含理论损耗 3.0 dB)
3	电压驻波比VSWR	Max.1.5
4	隔离度 Isolation	Min.17dB
5	幅度平衡 Amplitude Balance	≤ ±0.5dB
6	相位平衡 Phase Balance	±5°
7	阻抗 Impedance	50 Ohms
8	端口接头 Input/Output Connectors	SMD
9	功率容量 Power Capacity	50W
10	工作温度 Operation Temperature	-40°C ~ +85°C

Suggested PCB Layout

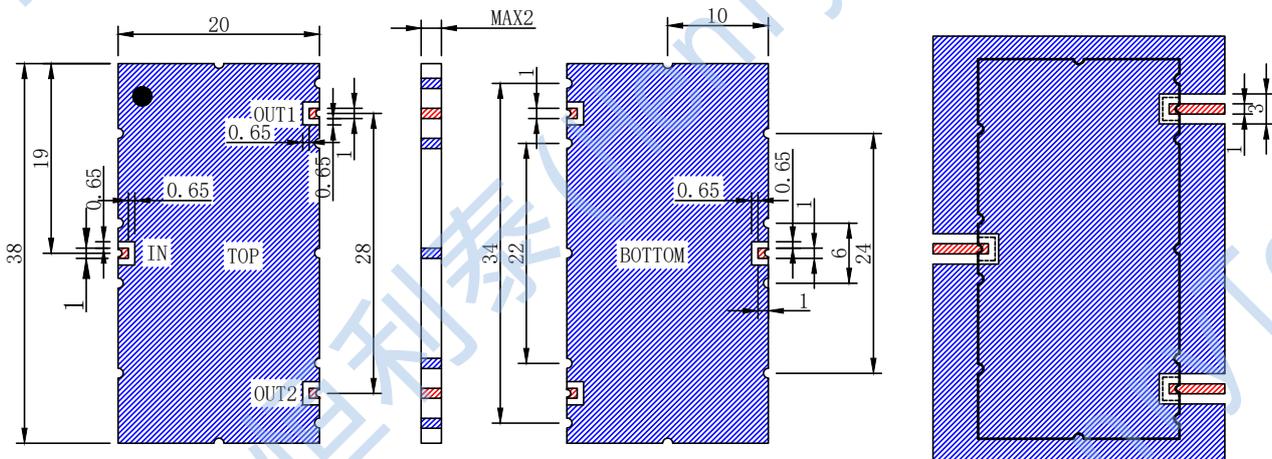

Tolerance: ±0.3mm