


HT-PD2-400-700M-20W

2-Way Power Divider Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	400-700 MHz
2	插入损耗 Insertion Loss	≤ 2.0dB (Excluding theoretical loss 未含理论损耗 3.0 dB)
3	电压驻波比VSWR	Max.2
4	隔离度 Isolation	Min.20dB
5	幅度平衡 Amplitude Balance	≤ ±0.5dB
6	相位平衡 Phase Balance	±8°
7	阻抗 Impedance	50 Ohms
8	功率容量 Power Capacity	20W
9	工作温度 Operation Temperature	-40°C ~ +85°C
10	端口接头 Input/Output Connectors	SMA-Female
11	表面处理 Surface Treatment	72小时防盐雾本导 (72-hour)

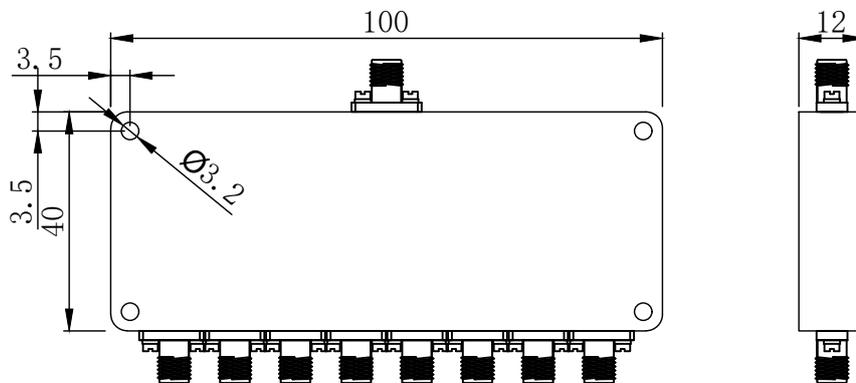

Units: mm
 Tolerance: ±0.3mm