

H3-B50-4-50-5000M

50-5000MHz 50Ω 1:4 Ratio Balun


APPLICATIONS

- Ideally suitable for PCS, wideband push-pull amplifiers and cellular applications.


FEATURES

- Surface mount
- Impedance ratio: 1:4
- Available on tape and reel
- RoHS compliant and Pb free
- 260°C reflow compatible

DIMENSIONS



Land Pattern



A	B	C
4.30	4.30	3.00
D		
1.27		

E	F	G
1.40	0.76	1.27
H		
4.83		


Unless otherwise stated dimensions are in mm

Tolerance: .xx ± 0.25, .xxx ± 0.05

ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0 (P1 / P2 / P3)			50/100/100		Ohm
Insertion Loss	50-5000MHz		2.5	3.0	dB
Phase Balance	50-5000MHz		10.0		Deg
Amplitude Balance	50-5000MHz		0.7		dB


FUNCTIONAL SCHEMATIC

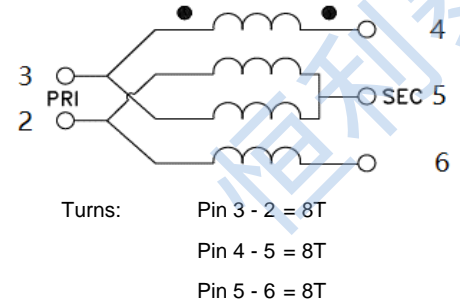

Pin Configuration

Pin No.	Function
1	Not used(ground)
2	Primary(Ground)
3	Primary Dot
4	Secondary Dot
5	Ground
6	Secondary

APPLICATION & TEST CIRCUIT

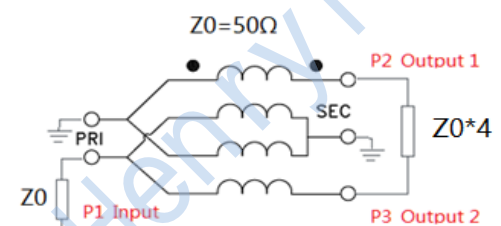

ABSOLUTE MAXIMUM RATINGS

Parameter	Value
RF Power	0.4W
DC Current	30mA
Operating Temperature Range	-40 to 85°C
Storage Temperature Range	-55 to 100°C

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Address: Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No. 50, Shuxi Road, Jinniu District, Chengdu City

TEST CURVE

