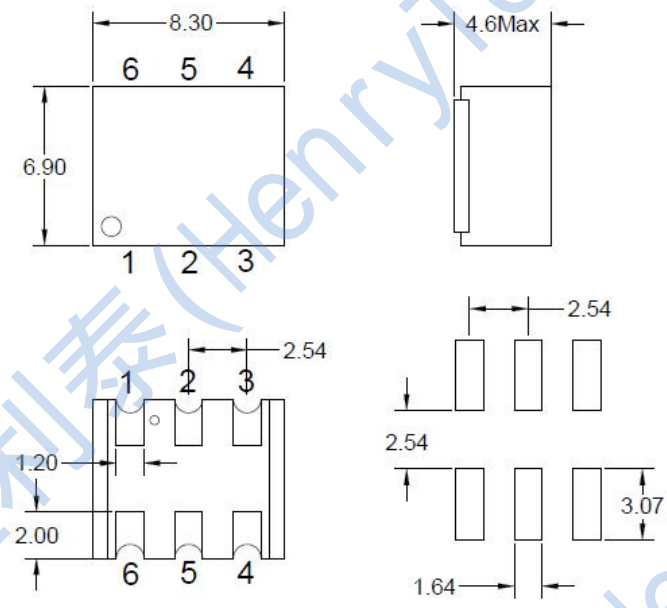


产品技术协议				产品型号	HT-RMK-5-472+														
				产品名称	倍频器	共 1 页	第 1 页												
				版本	A	修改状态	0												
序号	指标名称	符号	单位	指标、参数 (25°C)															
01	频率范围	Fo	MHz	输入: 675MHz-950MHz 输出: 3375MHz-4750MHz															
02	转换损耗	F5	C.L	Max: 26.5															
03	谐波输出	F1	H.O	dBc	Min: -3														
		F2			Min: 40														
		F3			Min: -8														
		F4			Min: 40														
		F6			Min: 40														
		F7			Min: 0														
06	输入功率	I.P	dBm	10~15dBm															
07	工作温度	To	°C	-40~85°C															
08	贮存温度	Ts	°C	-55~100°C															
09	外形尺寸	Fig	mm	8.3*6.9*4.6Max															
 <p>Units:mm Tolerance:±0.3</p> <table border="1"> <thead> <tr> <th>引脚</th> <th>符号</th> <th>功能</th> </tr> </thead> <tbody> <tr> <td>6</td> <td>/</td> <td>输入</td> </tr> <tr> <td>3</td> <td>/</td> <td>输出</td> </tr> <tr> <td>1, 2, 4, 5</td> <td>/</td> <td>接地</td> </tr> </tbody> </table>								引脚	符号	功能	6	/	输入	3	/	输出	1, 2, 4, 5	/	接地
引脚	符号	功能																	
6	/	输入																	
3	/	输出																	
1, 2, 4, 5	/	接地																	

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No. 50, Shuxi Road, Jinniu District, Chengdu City.