


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	12/06/15	12/06/15

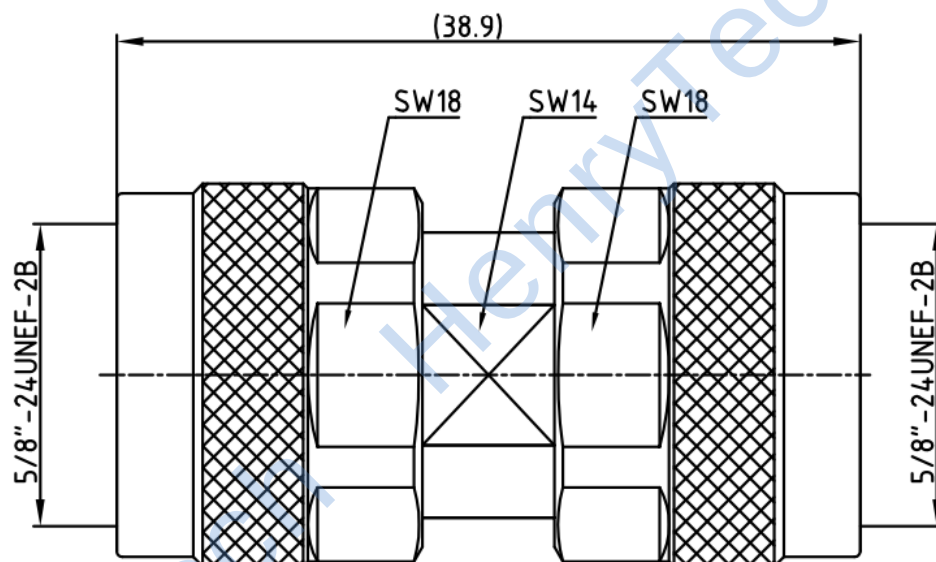

1 Electrical

1.1 Impedance: 50Ω

1.2 Frequency: DC-18GHz

1.3 VSWR: 1.25:1

2 Mechanical&Environmental

2.1 Temperature range -55°C ~+165°C

2.2 Durability(matings) >500

2.3 RoHs Compliant Yes

3 Material&Finish

3.1 Pin contact: Beryllium-Copper, gold plated

3.2 Body: Stainless Steel(SU303), Passivated

3.3 Insulators: PEI

4 Interface Standards

4.1 N MIL-STD-348A

Tel:Lee +86-28-85589664

Web:www.hltchips.com

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : H.wei 12/06/15
ENGINEER: L. yu 12/06/15
APPROVED : W. yi 12/06/15
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
**Double N Male
Stainless Steel
Precision RF Adapter**

PART NO: HL-N-JJG



DIMENSION IN MILLIMETERS (mm)

SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A