



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	19/03/17	19/03/17

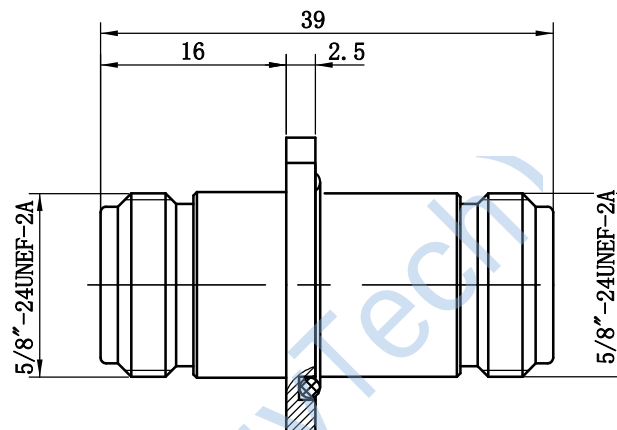

Mounting Hole



1 Electrical

1.1 Impedance: 50 Ω

1.2 Frequency: 0-11GHz

2 Environmental

2.1 Temperature -45° to 125°

2.2 RoHs compliant


3 Material&Finish

3.1 Inner Contact: Phosphor Bronze, gold plated

3.2 Outer Contact: brass, nickel plated

3.3 Insulators: PTFE

3.4 O-ring: Silicon Rubber

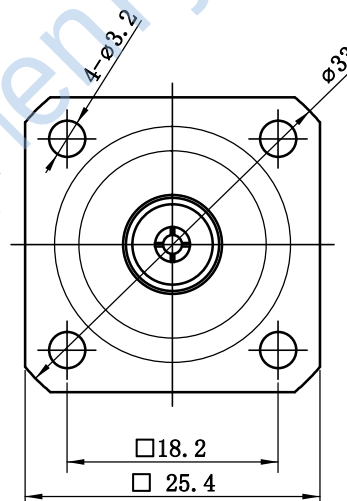

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17	TITLE:			
ENGINEER: L.yu 19/03/17	Precision Adapter			
APPROVED: W.yi 19/03/17	N Female to N Female Flange	 DIMENSION IN MILLIMETERS (mm)		
TOLERANCES UNLESS OTHERWISE SPECIFIED X ± 0.50 .X ± 0.20 .XX ± 0.10 ANGLES $\pm 1^\circ$	PART NO: HL-N-KFKM			
		SIZE: A4	SCALE: N/A	SHEET: 1/1
		REV: A		