
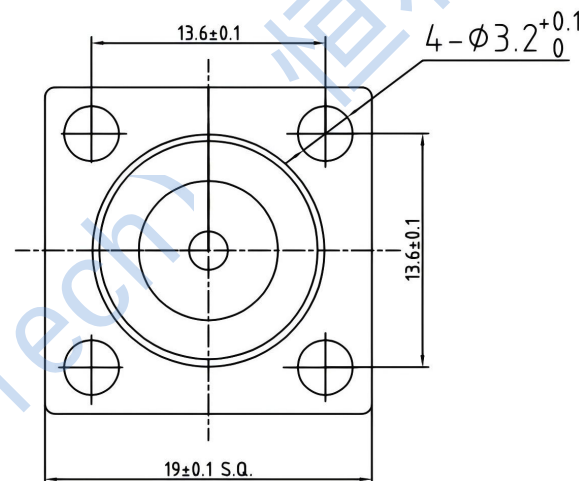


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	19/03/17	19/03/17

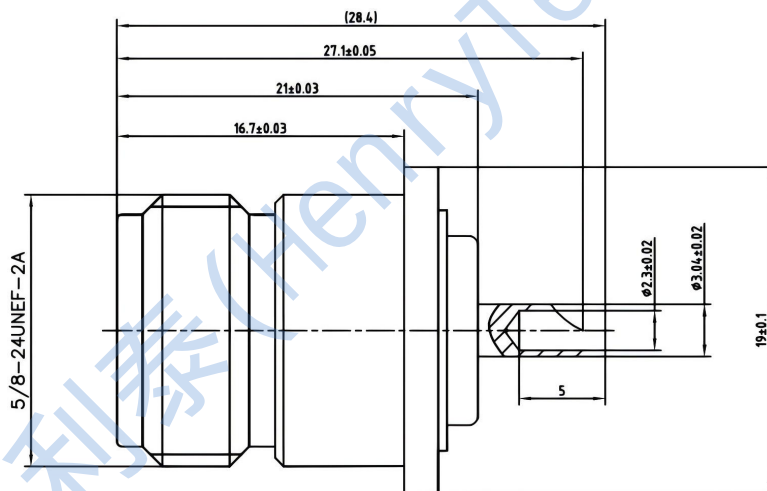

1 Electrical 电气性能

- 1.1 Impedance 特性阻抗: 50 Ω
- 1.2 Frequency 频率范围: DC~11GHz
- 1.3 VSWR 电压驻波比: ≤1.20@6GHz
- 1.4 Insertion Loss (dB): ≤0.05xSqt. (f_GHz)
- 1.5 Insulation resistance 绝缘电阻: ≥5000MΩ
- 1.6 Dielectric withstanding voltage 介质耐压: 1500V

2 Environmental&Mechanical 环境&机械性能

- 2.1 Temperature range 温度范围: -55℃~+125℃
- 2.2 RoHs Compliant 符合RoHs
- 2.3 Durability 寿命: >500 cycles (次)

3 Materials&Finish 材料&涂镀

- 3.1 Body 外壳: Brass, Tri-Metal Plated 黄铜, 镀三元
- 3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯
- 3.3 Contact Pin 中心导体: Brass, Gold plated 黄铜, 镀金

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED: X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°

TITLE: RF Coaxial Connector N Female Straight Flange Connector Terminal
PART NO: HL-N-KFD112

			
 DIMENSION IN MILLIMETERS (mm)			
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A