
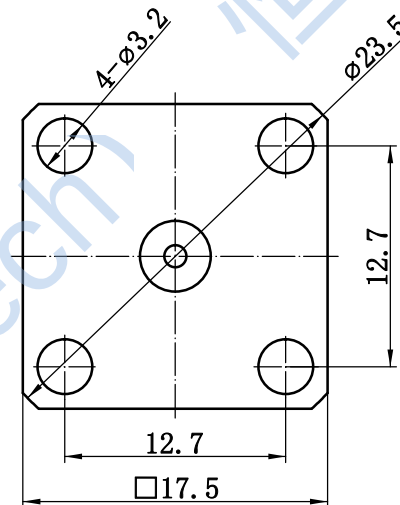


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H. wei	19/03/17	19/03/17

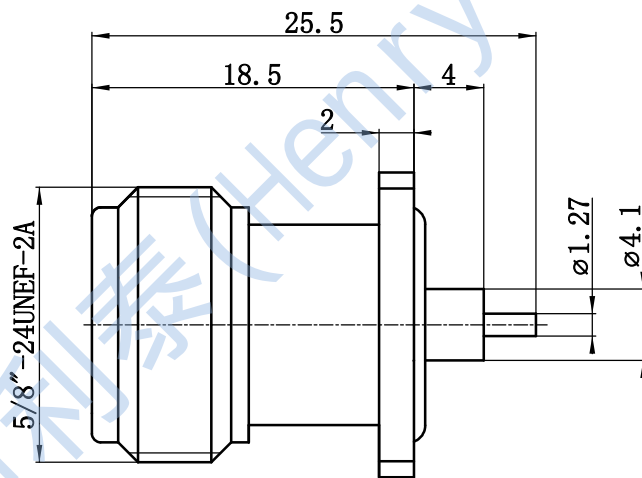

1 Electrical

1.1 Impedance	50 Ω
1.2 Frequency	DC-6GHz
1.3 VSWR	1.25:1

2 Environmental&Mechanical

2.1 Temperature range	-55°C~125°C
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&Finish

3.1 Body:	Brass, Nickel-plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Bronze, gold plated

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED: X ± 0.50 .X ± 0.20 .XX ± 0.10 ANGLES $\pm 1^\circ$

TITLE:
RF Coaxial Connector
N Female Straight Flange
Connconnector Flange
Mount

PART NO: HL-N-KFD1003M-1



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------