



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H. wei	19/03/17	19/03/17

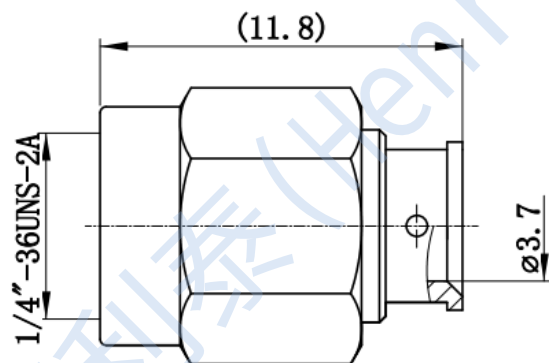

Recommended Cable Stripping Dimension

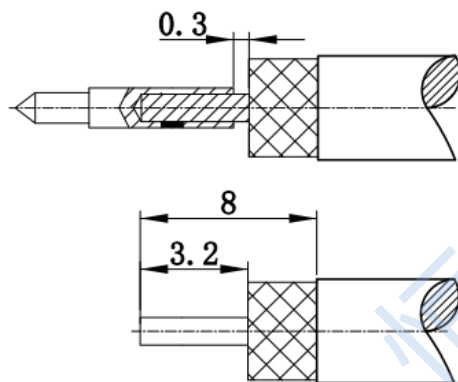

1 Electrical

1.1 Impedance	50 Ω
1.2 Frequency	DC-18GHz
1.2 Dielectric withstanding voltage	1000V(volts RMS)
1.3 Center contact resistance	$\leq 3\text{M}\Omega$
1.4 Outer contact resistance	$\leq 2\text{M}\Omega$
1.5 Insulation resistance	$\geq 5000\text{M}\Omega$
1.6 VSWR	$\leq 1.20@6\text{GHz}$

2 Environmental&Mechanical


2.1 Temperature range	-45℃~125℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass, Gold plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Brass Gold plated
3.4 Nut:	Brass, Gold plated

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17	TITLE: RF Connector ISMA Male for .141/RG402 Cable	 成都恒利泰科技有限公司 Chengdu HenryTech Technology co., Ltd			
ENGINEER: L.yu 19/03/17					
APPROVED: W.yi 19/03/17		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: HL - ISMA-JB3A-1	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A				