


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

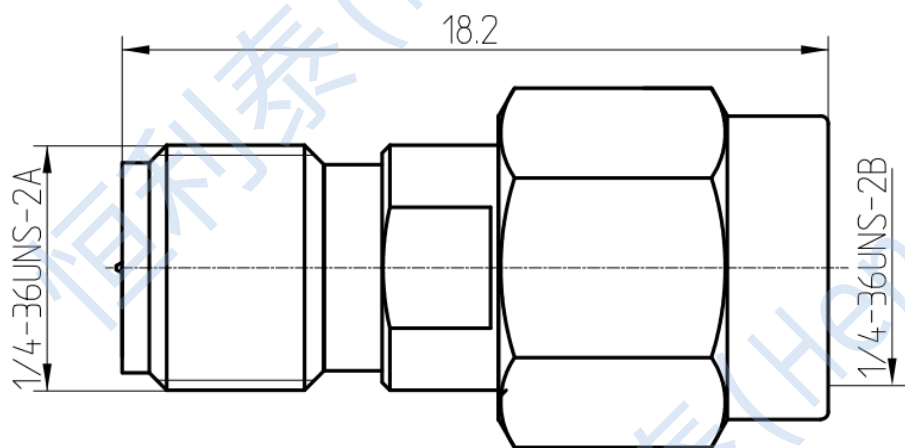

1 Electrical

1.1 Impedance	50 Ω
1.2 Frequency	DC~6GHz
1.3 VSWR	1.2:1

2 Environmental&Mechanical

2.1 Temperature range	-40℃~+85℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass, Gold Plated
3.2 Insulator:	Teflon,
3.3 Contact Pin:	Brass, Gold plated
3.4 Nut:	Brass, Gold Plated
3.5 Gasket:	Silicon Rubber (red color)

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED X ± 0.50 .X ± 0.20 .XX ± 0.10 ANGLES $\pm 1^\circ$

TITLE:
**RF Adapter RPSMA
male to SMA male**

 成都恒利泰科技有限公司
Chengdu HenryTech Technology co., Ltd

 DIMENSION IN MILLIMETERS (mm)

PART NO:	HL-RPSMA/SMA-JJ	SIZE:	A4	SCALE:	N/A	SHEET:	1/1	REV:	A
----------	-----------------	-------	----	--------	-----	--------	-----	------	---