

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

1 Electrical


- 1.1 Impedance: $50\ \Omega$
- 1.2 Frequency: DC-6GHz
- 1.3 VSWR: 1.20:1

2 Mechanical&Environmental

- 2.1 Temperature range $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 2.2 Durability(matings) >500
- 2.3 RoHs Compliant Yes


3 Material&Finish

- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Brass Gold plated
- 3.3 Insulators: Teflon

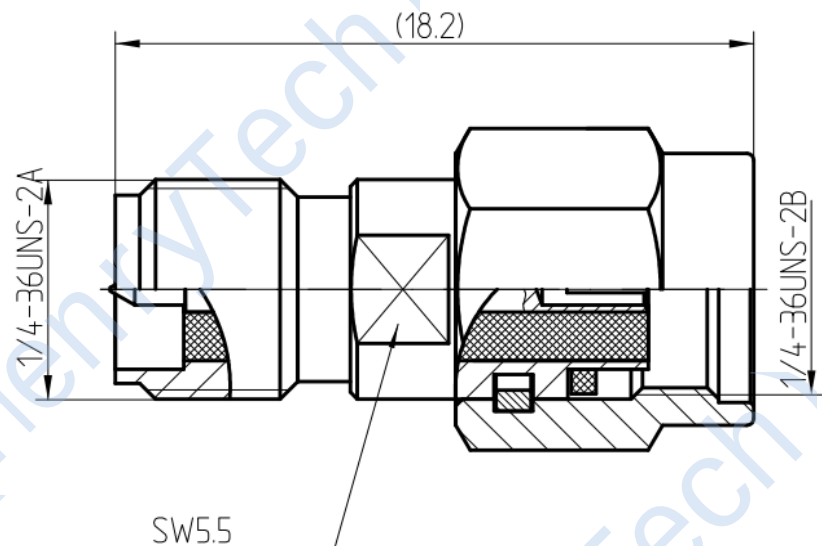

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17	TITLE: RF Adapter RPSMA male to female	 成都恒利泰科技有限公司 Chengdu HenryTech Technology co., Ltd			
ENGINEER: L.yu 19/03/17					
APPROVED: W.yi 19/03/17		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED: X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: HL-RPSMA-JK	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A	