


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

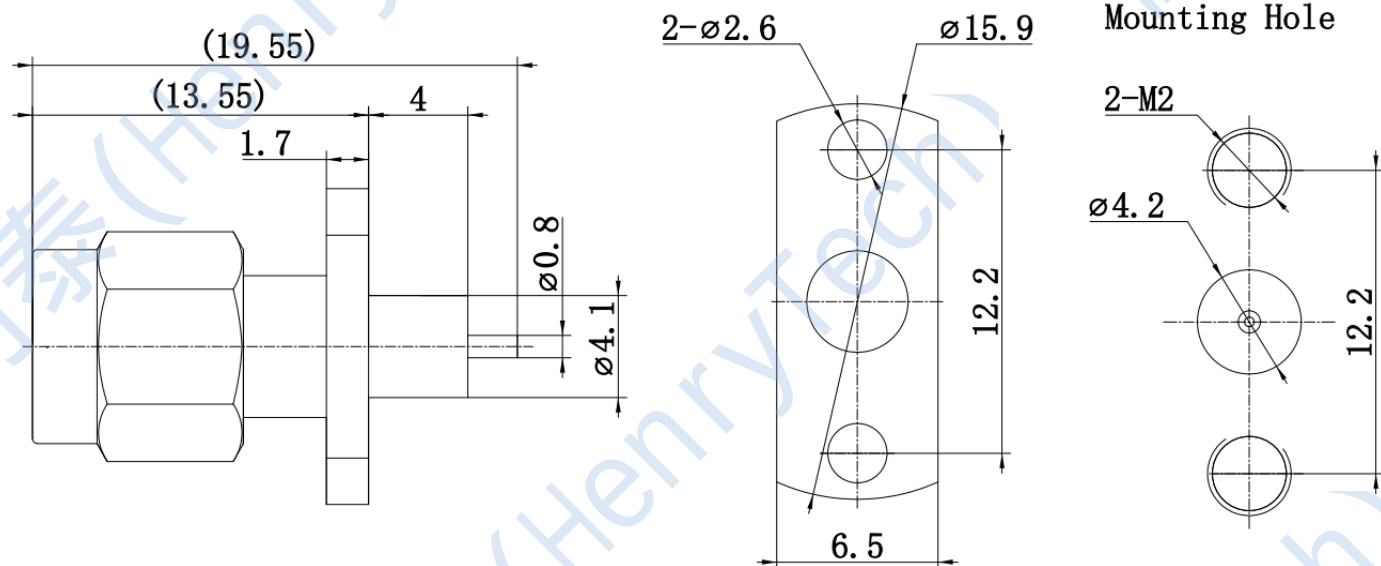

1 Electrical 电性能

- 1.1 Impedance 特性阻抗 50 Ω
- 1.2 Frequency 频率范围 DC~18GHz
- 1.3 Dielectric withstanding voltage 介质耐压 1000V(volts RMS)
- 1.4 VSWR 电压驻波比 ≤1.20@6GHz

2 Environmental&Mechanical 温度范围&机械性能

- 2.1 Temperature range 温度范围 -45℃~125℃
- 2.2 RoHs Compliant YES
- 2.3 Durability(寿命) >500 cycles (500次)

3 Materials&plating 材料&涂覆

- 3.1 Body 外导体 Brass; Nickel Plated 黄铜镀镍
- 3.2 Insulator 绝缘介质 Teflon
- 3.3 Contact Pin 内导体 Brass; Gold, Plated 黄铜镀金

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17	TITLE:	 成都恒利泰科技有限公司 Chengdu HenryTech Technology co., Ltd			
ENGINEER: L.yu 19/03/17	RF Coaxial Connector SMA Male Flange Connector Terminal				
APPROVED: W.yi 19/03/17		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED: X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: HL-SMA-JFD1060	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A	