

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

1 Electrical



1.1 Impedence	50Ω
1.2 Frequency	DC~18GHz
1.3 Dielectric withstanding voltage	1000V(volts RMS)
1.4 Center contact resistance	≤ 3MΩ
1.5 Outer contact resistance	≤ 2MΩ
1.6 Insulation resistance:	≥5000MΩ
1.7 PIM	<-155dBc

2 Environmental&Mechanical

2.1 Temperature range	-40℃~+70℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass; SUCO-plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Brass, Silver plated
3.4 Nut:	Brass, SUCO-Plated
3.4 Gasket:	Silicon Rubber (red color)

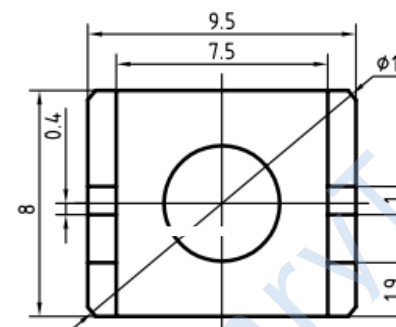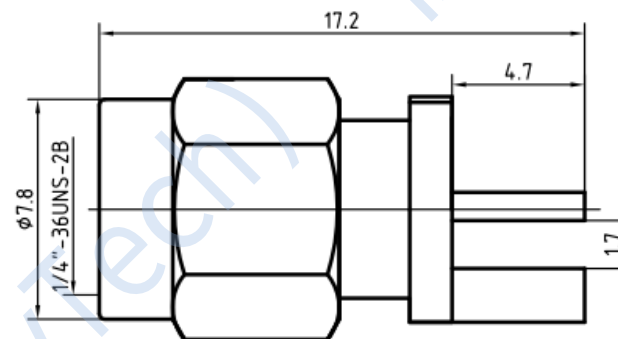


Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°

TITLE:	RF Connector SMA Male PCB Mount
PART NO:	HL-SMA-JHDC

 成都恒利泰科技有限公司 Chengdu HenryTech Technology co., Ltd			
 DIMENSION IN MILLIMETERS (mm)			
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A