
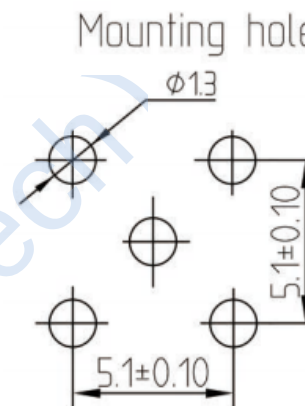


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

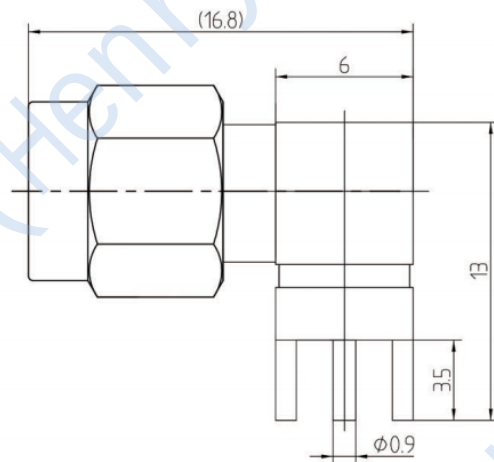

1 Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Working voltage: $\leq 500V$
- 1.3 Insulation resistance: $\geq 1000M\Omega$
- 1.4 Dielectric withstanding voltage: 750V
- 1.5 Center Contact resistance $\leq 5M\Omega$
- 1.6 Outer contact resistance $\leq 2.5M\Omega$

2 Material&Finish

- 2.1 Inner Contact: Brass, gold plated
- 2.2 Outer Contact: brass, gold plated
- 2.3 Insulators: Teflon
- 2.4 Spring Contact: Beryllium copper, gold plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED: X ± 0.50 .X ± 0.20 .XX ± 0.10 ANGLES $\pm 1^\circ$

TITLE:
RF Connector SMA Male Right Angle PCB Mount
PART NO: HL-SMA-JWHD1

成都恒利泰科技有限公司 Chengdu HenryTech Technology co., Ltd			
DIMENSION IN MILLIMETERS (mm)			
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A