

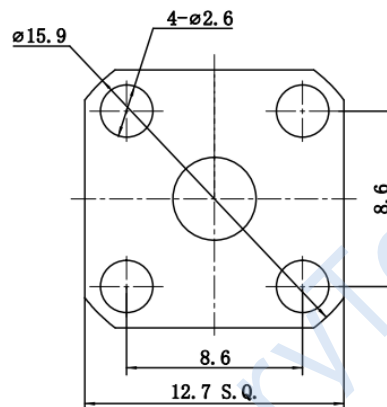


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	19/03/17	19/03/17

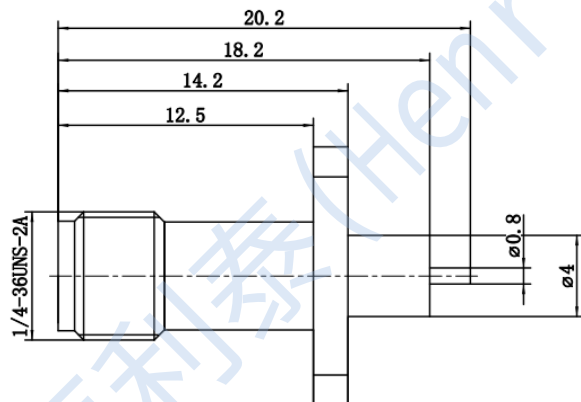

Recommended Mounting Hole



1 Electrical

- 1.1 Impedence 50 Ω
- 1.2 Frequency DC~6GHz
- 1.3 VSWR 1.15:1

2 Environmental&Mechanical

- 2.1 Temperature range -55℃~125℃
- 2.2 RoHs Compliant Yes
- 2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass Tri-Metal plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Beryllium Copper; Gold plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED X ± 0.50 .X ± 0.20 .XX ± 0.10 ANGLES $\pm 1^\circ$

TITLE:
RF Coaxial Connector
RF Connector SMA
Female Flange Mount

PART NO: HL-SMA-KFD1056

成都恒利泰科技有限公司
Chengdu HenryTech Technology co., Ltd

DIMENSION IN MILLIMETERS (mm)

SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A