


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

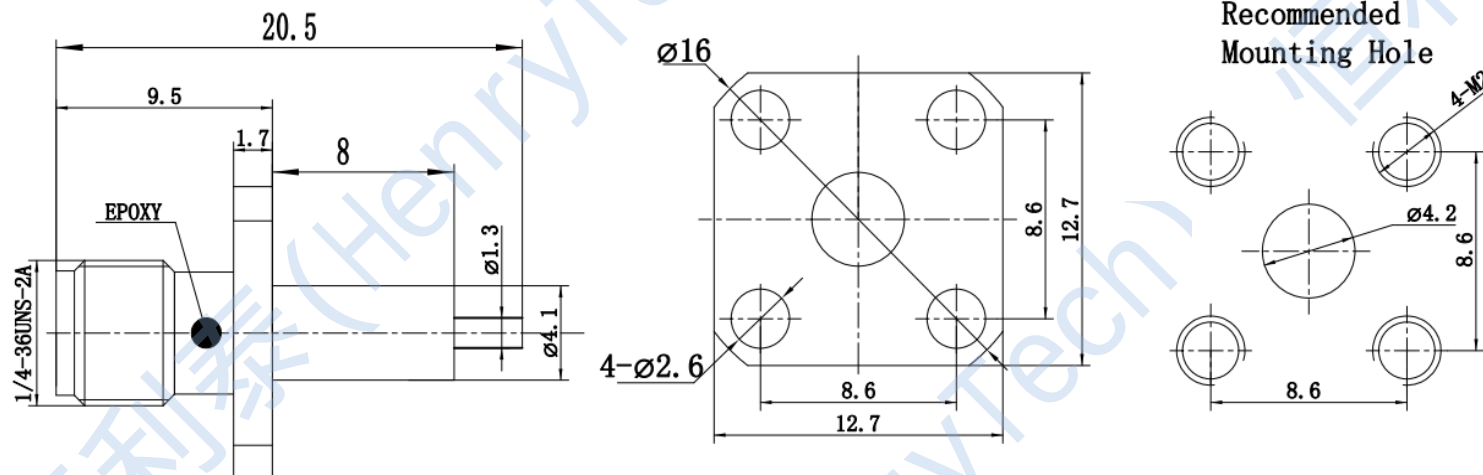

1 Electrical 电气性能

- 1.1 Impedance 特性阻抗: 50 Ω
- 1.2 Frequency 频率范围: DC~18GHz
- 1.3 VSWR 电压驻波比: ≤1.20@6GHz
- 1.4 Insertion Loss (dB): ≤0.05xSqrt. (f_GHz)
- 1.5 Insulation resistance 绝缘电阻: ≥5000MΩ
- 1.6 Dielectric withstanding voltage 介质耐压: 1000V

2 Environmental&Mechanical 环境&机械性能

- 2.1 Temperature range 温度范围: -55℃~+125℃
- 2.2 RoHs Compliant 符合RoHs
- 2.3 Durability 寿命: >500 cycles (次)

3 Materials&Finish 材料&涂镀

- 3.1 Body 外壳: Brass, Gold Plated 黄铜, 镀金
- 3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯
- 3.3 Contact Pin 中心导体: Beryllium-Copper, Gold Plated 铍青铜, 镀金

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17	TITLE: RF Connector SMA Female Flange Mount	 成都恒利泰科技有限公司 Chengdu HenryTech Technology co., Ltd			
ENGINEER: L.yu 19/03/17					
APPROVED: W.yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: HL-SMA-KFD177	SIZE: A4		SCALE: N/A	SHEET: 1/1	REV: A