

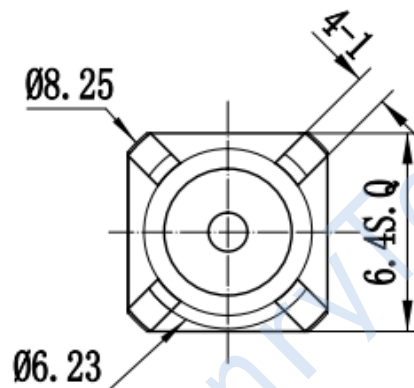


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		H.wei	19/03/17	19/03/17

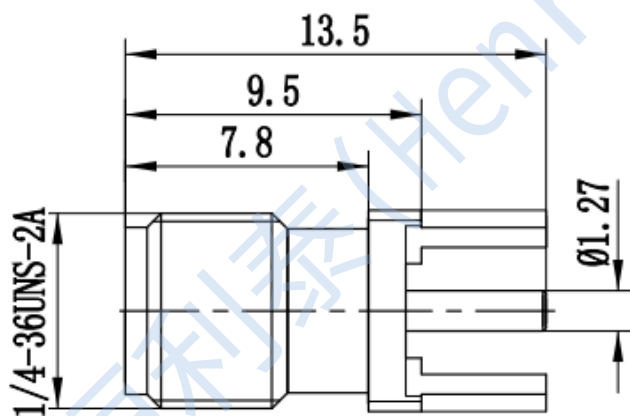

Recommended Mounting Hole

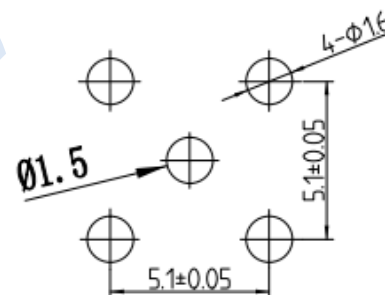

1 Electrical


1.1 Impedance	50 Ω
1.2 Frequency	DC-18GHz
1.3 VSWR	1.20:1

2 Materials&plating

2.1 Body:	Stainless Steel, Gold plated
2.2 Insulator:	Teflon
2.3 Contact Pin:	Beryllium-copper, gold plated

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17	TITLE: RF Coaxial Connector RF Connector SMA Female PCB Mount	 成都恒利泰科技有限公司 Chengdu HenryTech Technology co., Ltd			
ENGINEER: L.yu 19/03/17					
APPROVED: W.yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: HL-SMA-KHD15	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A	 DIMENSION IN MILLIMETERS (mm)