


HLT160040200R

10MHz~40GHz 1600nH Inductor

技术参数 (Technical Parameter) :

产品名称 (Product Name)	型号 (Part Number)	频率范围 (Frequency Range)	电感量 (nH)	最大承受电流 (mA)	线径 (mm)	工作温度 (℃)
锥形电感 (Conical Inductor)	HLT160040200R	10MHz~40GHz	1600±20%	200	0.05	-55~+125


外形尺寸 (Dimension)

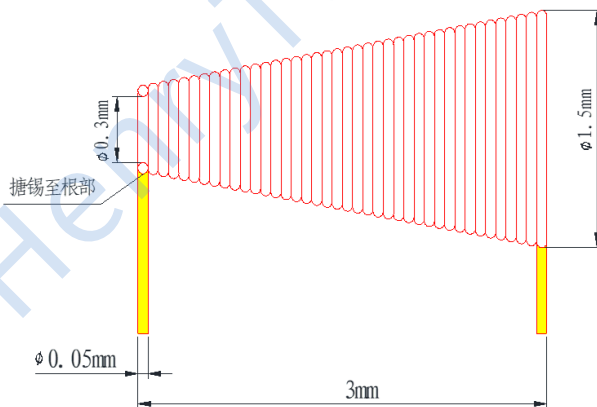

备注:

- 1、储存条件(Storage conditions): 温度(Temperature)20-25℃, 湿度(Humidity) 40%-60%;
- 2、适用于带焊工艺 (Suitable for tape welding process) 。

典型测试曲线 (Typical Test Curve) :

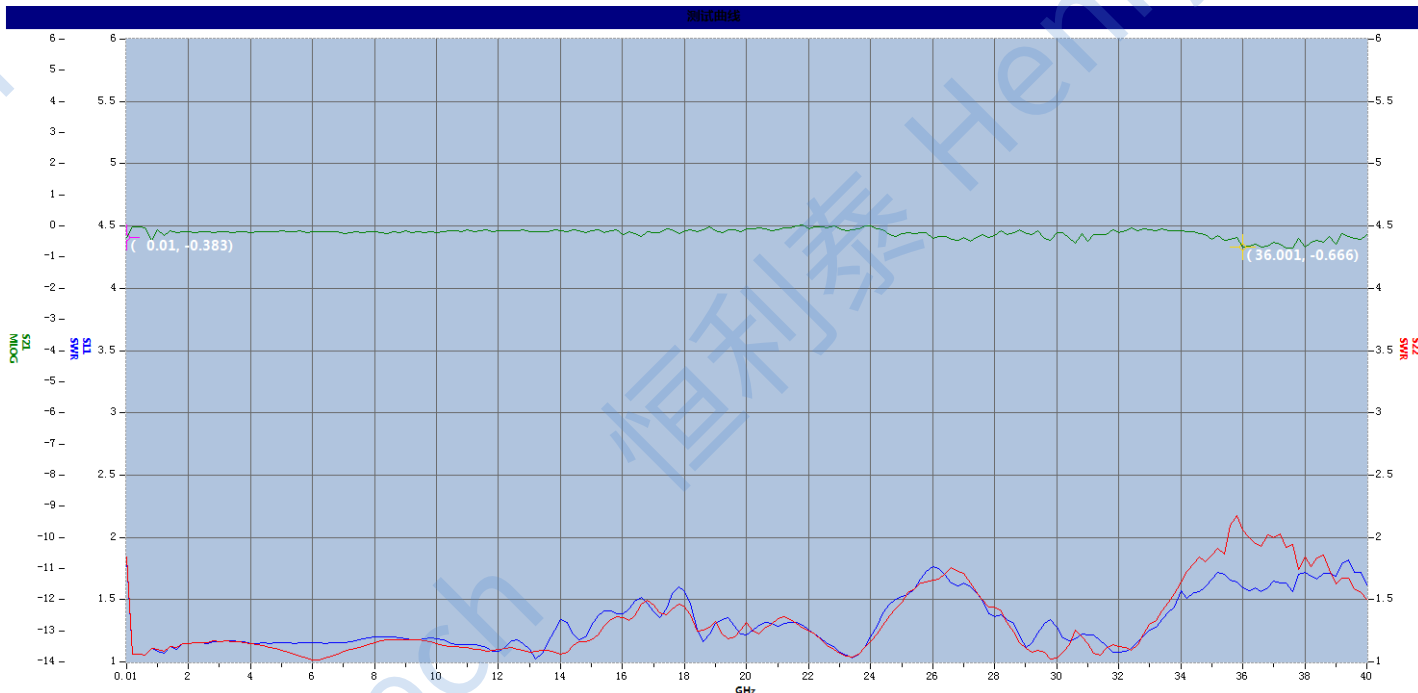

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Address: No.198 Tianqin East Street, Gaoxin West District, Chengdu City