


HT-ADE-30+技术协议

Frequency Mixer

200 to 3000 MHz

指标名称	符号	单位	指标、参数 (25℃)
频率范围	Fo	MHz	200MHz-3000MHz
转换损耗	C. I	dB	Max: 9.8
L0-RF 隔离度	Iso	dB	Min: 20
L0-IF 隔离度	Iso	dB	Min: 7
1dB COMP.		dBm	Typ: 1
IP3		dBm	Typ: 14
工作温度	To	℃	-40~85℃
贮存温度	Ts	℃	-55~100℃
外形尺寸	Fig	mm	8.3*6.9*4.8Max

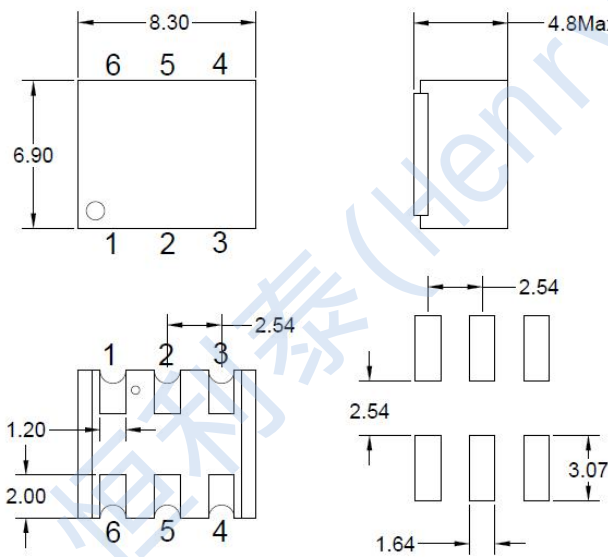

Units:mm
Tolerance:±0.3

管脚号	功能
3	RF
6	L0 (+7dBm)
2	IF
1, 4, 5	GND

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Address: Room 1401, Building 5, Huaxi Science and Technology Innovation Center, No. 50, Shuixi Road, Jinniu District, Chengdu City