


HT-ADE-35+技术协议

Frequency Mixer

Level 7 (LO Power +7 dBm) 1600 to 3500 MHz

序号	指标名称	单位	指标、参数 (25℃)
1	频率范围 (Fo)	MHz	LO/Rf: 5~3500MHz
			IF: 5~2500MHz
2	转换损耗 (C. I)	dB	Max: 10
3	LO-RF 隔离度	dB	Min: 18
4	LO-IF 隔离度	dB	Min: 17
5	工作温度 (To)	℃	-45~85℃
6	贮存温度 (Ts)	℃	-55~100℃
7	外形尺寸 (Fig)	mm	8.3*6.9*3.6Max

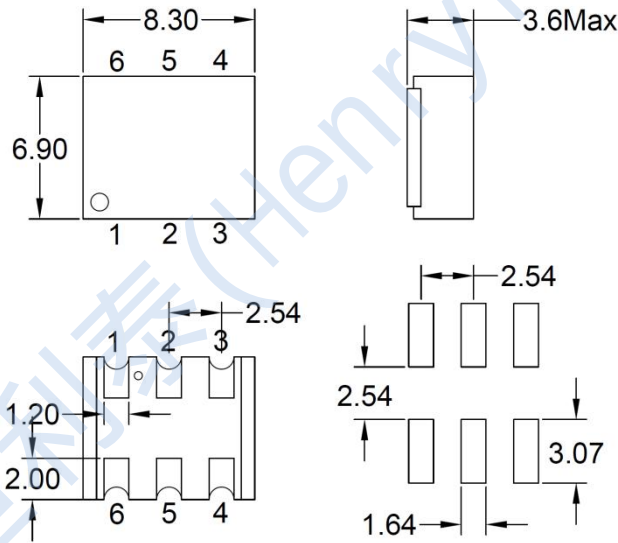

Units:mm
Tolerance:±0.3

管脚号	功能
3	RF
6	LO (+13dBm)
2	IF
1, 4, 5	GND

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Address: Room 1401, Building 5, Huaxi Science and Technology Innovation Center, No. 50, Shuixi Road, Jinniu District, Chengdu City