LTCC Balun Transformer


低温共烧陶瓷 巴伦变压器

产品型号（Product model）：HM-B2012-80-140M-1

一、电气性能 Electrical Specifications（TAMB=25°C）

No.	项目		指标
1	通带频率 Passband Frequency		80~140MHz
2	阻抗比 Impedance Ratio		50Ω/50Ω=1:1
3	插损 Insertion Loss Above 3dB	80~140MHz	≤1.0dB
		90~120MHz	≤0.8dB
4	不平衡端回波损耗 Return Loss at Unbalanced Port	80~140MHz	≥10dB
5	振幅不平衡度 Amplitude Difference	80~140MHz	≤0.7dB
		@80MHz	≤0.5dB
		@100MHz	≤0.5dB
		@120MHz	≤0.5dB
6	相位不平衡度 Phase Difference	80~140MHz	≤±10°
		@80MHz	≤±5°
		@100MHz	≤±5°
		@120MHz	≤±5°
7	共模抑制度 CMRR	80~140MHz	≥15dB
8	工作温度 Operating Temperature		-40℃ ~ +85℃
9	存储温度 Storage Temperature		-40℃ ~ +85℃
10	最大输入功率 Input Power max		3W（CW）

二、外形尺寸 Outline Drawing（Unit：mm）

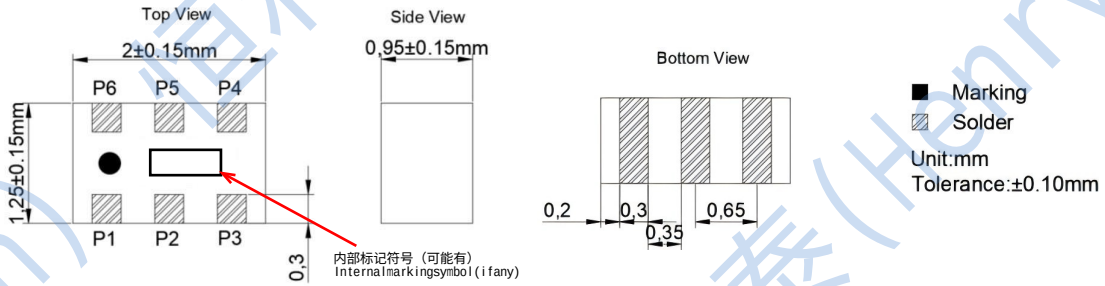


三、引脚定义 Pin Connections

不平衡端 Unbalance Port（PRIMARY DOT ）	1
接地 GND or DC feed + RF GND	2
平衡端①Balance Port（SECONDARY DOT）	3
平衡端②Balance Port（SECONDARY）	4
接地 GND	5
不连接 NC	6

Tel:+86-28-85589664
E-mail:428858430@qq.com
Web:www.hltchips.com
Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No.50, Shuxi Road, Jinniu District, Chengdu City

LTCC Balun Transformer
低温共烧陶瓷 巴伦变压器

四、焊盘尺寸 PCB Land Pattern




注意 Note：
1. 单位 Unit: mm
2. 线宽应设计为匹配 50Ω特性阻抗，具体取决于 PCB 材料和厚度。
Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness

五、测试曲线 Test Curve @ 25℃



六、回流焊温度 Reflow Soldering Temperature

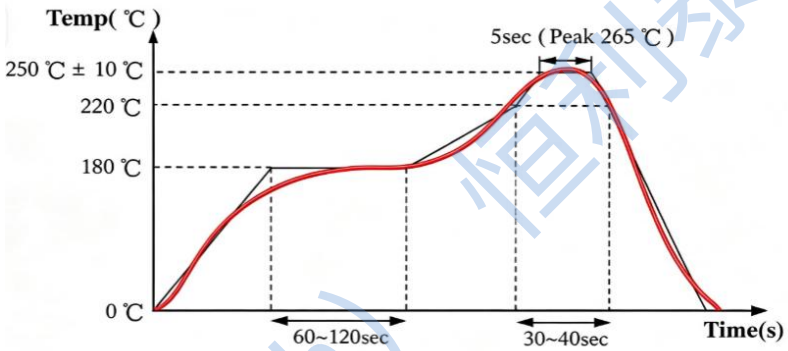

Tel:+86-28-85589664
E-mail:428858430@qq.com
Web:www.hltchips.com
Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No.50, Shuxi Road, Jinniu District, Chengdu City