LTCC Bandpass Filter 低温共烧陶瓷 带通滤波器


产品型号（Product model）：HM-BP4532-7620-20M

一、电气性能 Electrical Specifications（TAMB=25°C）

No.	项目		指标
1	中心频点 Center Frequency		7620MHz
2	通带频率 Passband Frequency		7610-7630MHz
3	阻抗 Impedance		50Ω
4	插损 Insertion Loss	7610~7620MHz	≤3.2dB
5	纹波 Ripple	7610~7620MHz	≤0.5dB
6	驻波比 VSWR	7610~7620MHz	≤2.0
7	带外抑制 OOBR	DC~6000MHz	≥60dB
		9300MHz	≥30dB
		10000~16000MHz	≥50dB
8	工作温度 Operating Temperature		-55℃ ~ +100℃
9	存储温度 Storage Temperature		-55℃ ~ +100℃
10	最大输入功率 Input Power max		0.5W

二、外形尺寸 Outline Drawing（Unit：mm）


L	4.50±0.20
W	3.20±0.20
T	1.50±0.20
A	0.40±0.10
B	0.30±0.10
C	0.85±0.10
D	0.80±0.10
E	0.30±0.10

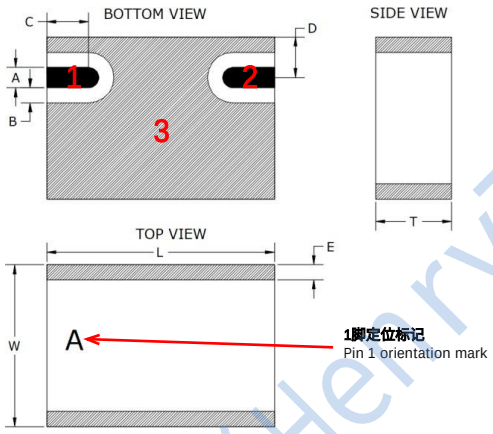

三、引脚定义 Pin Connections

输入 input Port	1
输出 output Port	2
接地 GND	3

四、焊盘尺寸 PCB Land Pattern

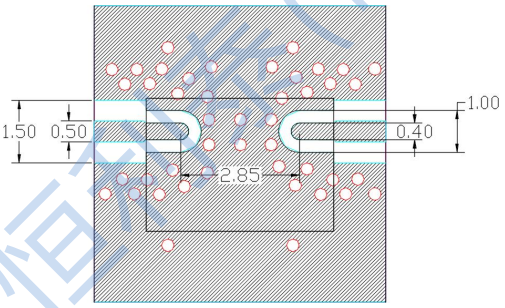


注意 Note：

1. 单位 Unit：mm
2. 线宽应设计为匹配 50Ω 特性阻抗，具体取决于 PCB 材料和厚度。
Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness


Tel:+86-28-85589664
E-mail:428858430@qq.com
Web:www.hltchips.com
Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No.50, Shuxi Road, Jinniu District, Chengdu City

LTCC Bandpass Filter 低温共烧陶瓷 带通滤波器

五、测试曲线 Test Curve @ 25℃

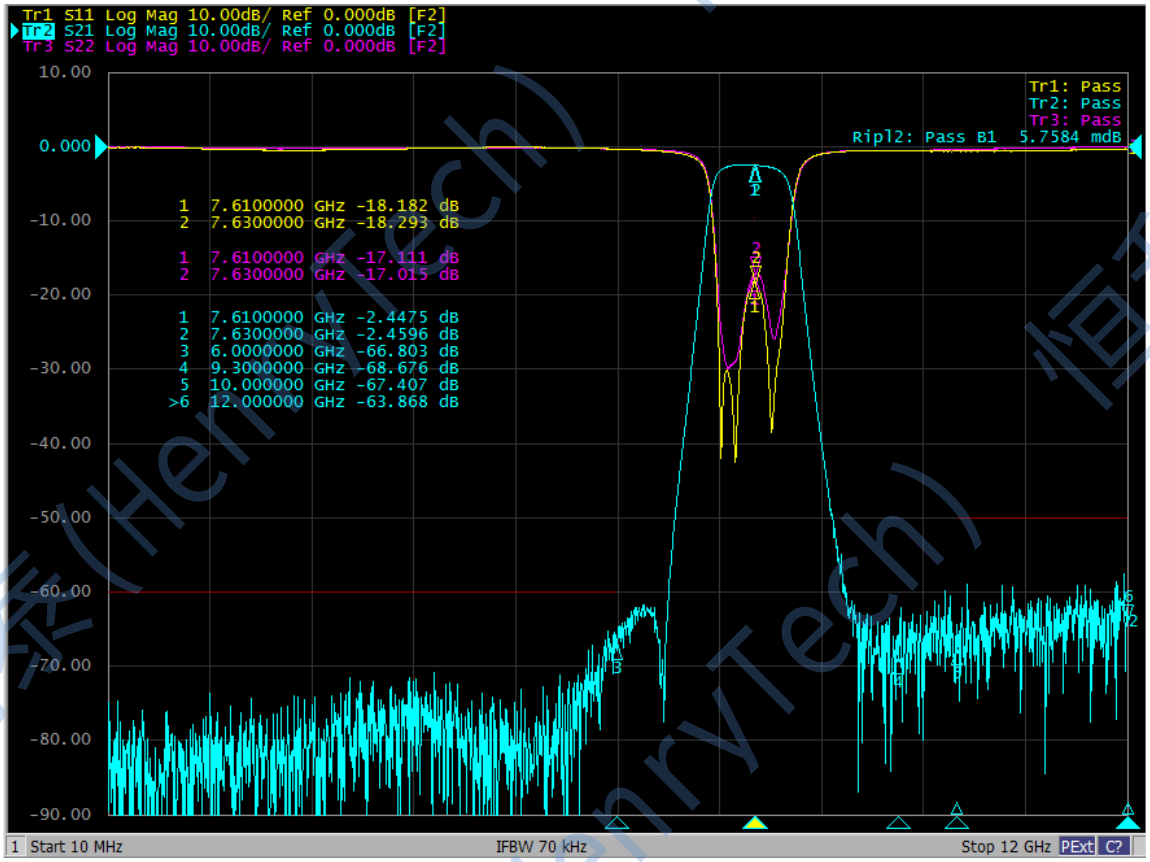

六、回流焊温度 Reflow Soldering Temperature

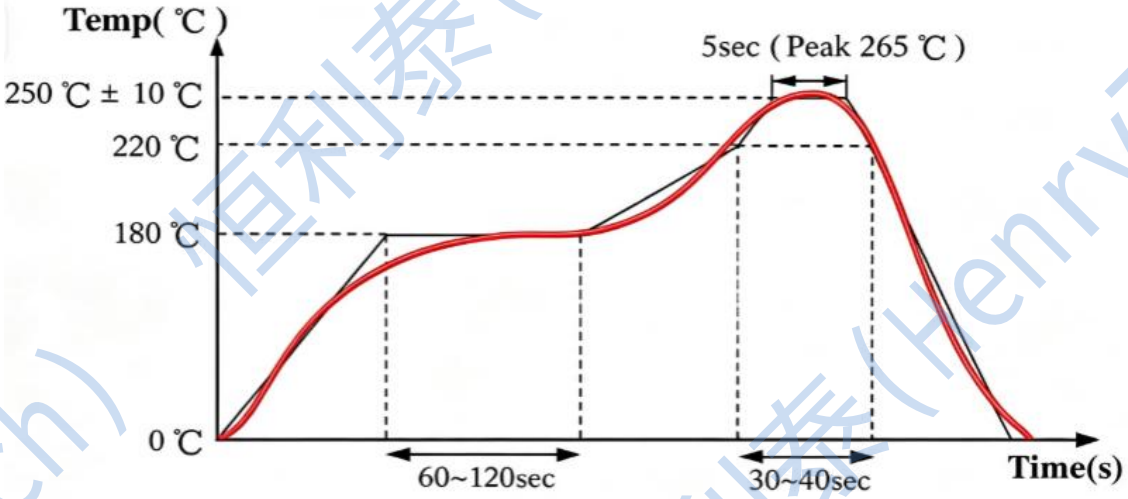

Tel:+86-28-85589664
E-mail:428858430@qq.com
Web:www.hltchips.com
Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No.50, Shuxi Road, Jinniu District, Chengdu City