
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H.wei	12/7/13	12/7/13

1 Electrical电气性能
1.1 Impedance特性阻抗：50Ω
1.2 Frequency频率范围：DC～18GHz
1.3 VSWR电压驻波比:≤1.30
1.4 Insulation resistance绝缘电阻：≥5000MΩ
1.5 Dielectric withstanding voltage介质耐压：1000V

2 Environmental&Mechanical环境&机械性能
2.1 Temperature range温度范围：-55℃～+125℃
2.2 RoHs Compliant 符合RoHs
2.3 Durability寿命：>500 cycles（次）

3 Materials&Finish材料&涂镀
3.1 Body外壳:Brass,Gold Plated 黄铜,镀金
3.2 Insulator 绝缘介质:Teflon 聚四氟乙烯
3.3 Contact Pin中心导体:Brass,Gold Plated 黄铜,镀金
3.4 Coupling Nut连接螺套：Stainless Steel Passivated， 不锈钢，钝化

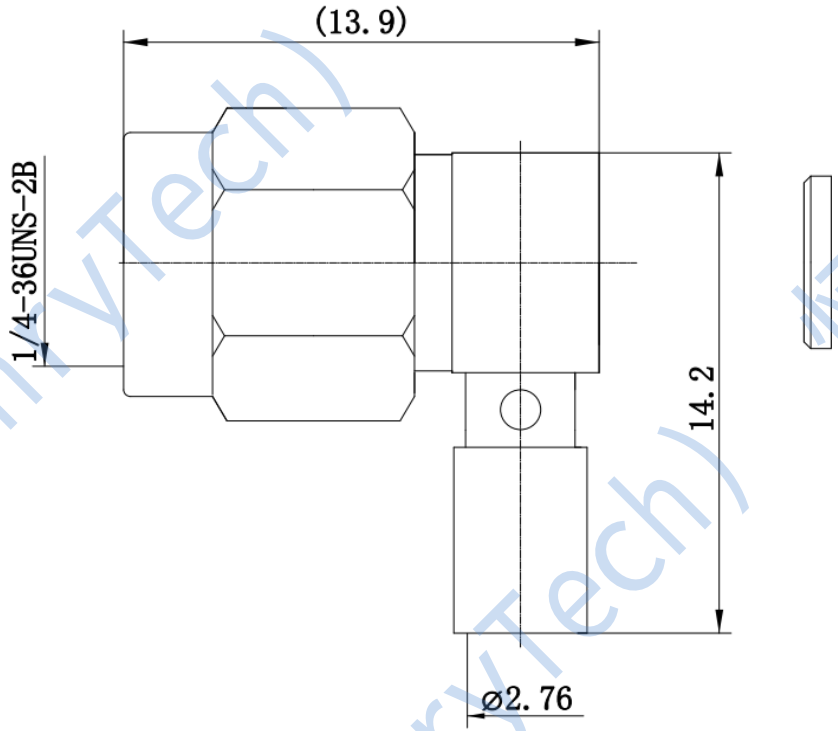

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 12/07/13	TITLE: RF Coaxial Connector	HenryTech	
ENGINEER: L.yu 12/07/13	SMA Male R/A Conn. For .086 Cable	DIMENSION IN MILLIMETERS (mm)	
APPROVED: W.yi 12/07/13			
TOLERANCES UNLESS OTHERWISE SPEFICIED: X ±0.50, .X ±0.20, .XX ±0.10, ANGLES ±1°	PART NO: HL-SMA-JWB2CG	SIZE: A4 / SCALE: N/A / SHEET: 1/1 / REV: A	